

SIORA

Technical information

narbutas.com



Other documents available for this product

- User manual for SILORA task chairs
- Environmental product profile
- NARBUTAS product care guide

Warranty

See Warranty statement



Technical information

Seat

- Depth-adjustable (60 mm run range);
- Seat carrier made of black PP (polypropylene) reinforced with fiberglass;
- Soft seat part made of polyurethane (PU) and can be upholstered with fabrics of different classes.

Backrest

- Available in black plastic upholstered in mesh;
- Made of black PA (nylon) reinforced with fiberglass.

Lumbar support (optional)

- Height-adjustable (70 mm run range);
- Made of black PA (nylon) reinforced with fiberglass.

Armrests (optional)

- 2D (two directions) adjustable armrests made of black PA (nylon), reinforced with fiberglass;
- 2D armrests: height-adjustable (100 mm run range) and width-adjustable (65 mm run range);
- 3D (three directions) adjustable armrests made of black PA (nylon), reinforced with fiberglass;
- 3D armrests: height-adjustable (100 mm run range), width-adjustable (65 mm run range), and forward/backward adjustable pad (50 mm run range);
- The upper part of the 2D and 3D armrests is coated with PU (polyurethane) pads for a soft touch.

Mechanism

- Synchronized mechanism with tension adjustment;
- 5 locking positions;
- Backrest tilt: 21°; forward tilt: 3°;
- Lockable in the working position via an integrated lever;
- Height adjustment controlled by the same integrated lever;
- Outer body and backrest connector made of black PA (nylon) reinforced with fiberglass;
- Housing and inner parts made of powder-coated steel and aluminium.

Gas lift

- Black finish;
- 110 mm run range;
- Maximum load up to 110* kg.

*Tested according to standard EN 1335-1:2020+A1:2023, which certifies that the chair can withstand a load of up to 110 kg. Exceeding this limit or improper use may cause damage or injury.

Base

- Five-star, made of black PA (nylon) reinforced with fiberglass;
- External Ø715 mm.





Castors

- Rubber-free wheel castors for hard floors, Ø65 mm;
- PA (polyamide) free wheel castors for soft floors, Ø65 mm;
- Rubber self-braking castors for hard floors, Ø65 mm;
- PA (polyamide) self-braking castors for soft floors, Ø65 mm.

Range

Task chair

No armrests/ Adjustable armrests
With/without lumbar support

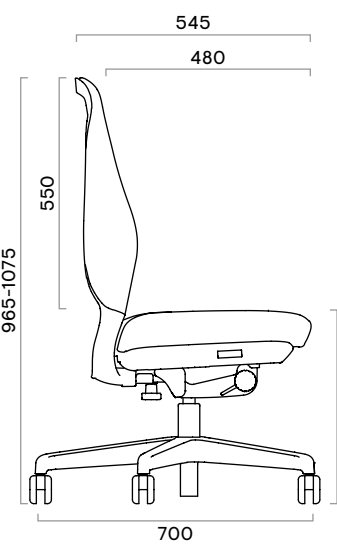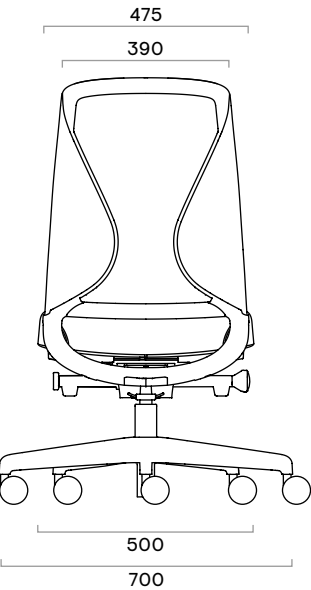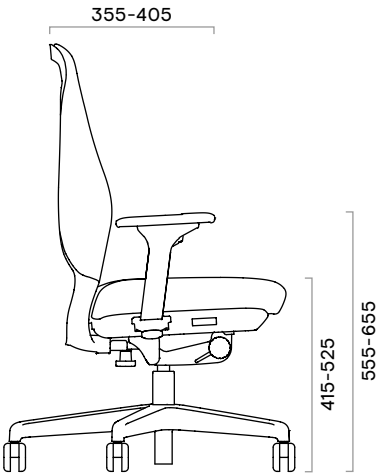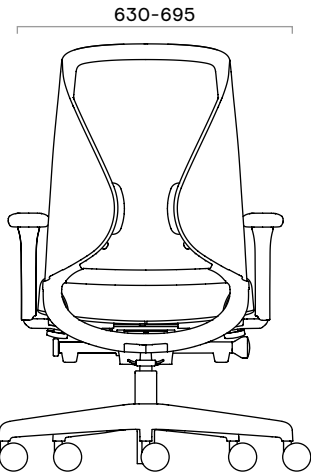


PLEASE NOTE: The height of task chairs is indicated according to EN 1335-1:2020+A1:2022 standard, which is measured at the centre of the seat under a 60 kg load.

Additional information

Comes unassembled, with only the mechanism mounted to the seat and the lumbar support inserted into the backrest. The base, castors, gas lift and armrests are packed separately but included in a single box with the remaining chair components.

Tool-free assembly of armrests and backrest.

The chair box dimensions remain the same regardless of the chosen chair configuration.

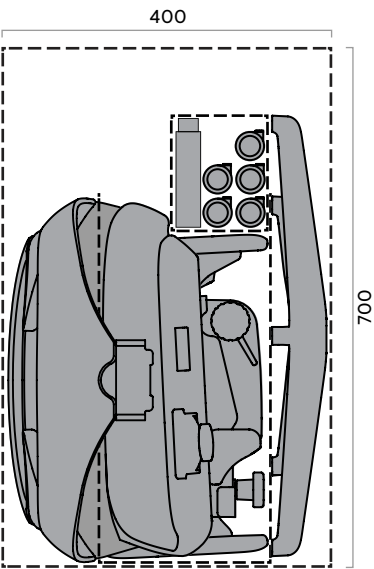

Options of armrests

	No armrest	2D	3D
Options			
Task	✓	✓	✓

Functions of armrests

	2D	3D
Functions		
Height adjustment (100 mm run range)	✓	✓
Top movement: forward and backward (50 mm run range)	✗	✓
Width adjustment (65mm run range)	✓	✓