



---

## FEATURES

- Telescopic frame
- Equipped with two motors
- Column type – DOWN version
- Two types of lifting columns with anti-collision
- Two types of feet
- Two types of height adjustment buttons

---

## QUALITY STANDARD

### Supplier standards

- IEC 60335-1:2010
- EN 61000-3-2:2006, -A1:2009, -A2:2009
- EN 61000-3-2:2014
- EN 61000-3-3:2008
- EN 61000-4-2, -3, -4, -5, -6, -11LST EN 527-1:2011
- EN 61000-6-2:2005
- EN 61000-6-3:2007
- EN55014-1:2016+A1:2009+A2:2011
- EN55014-1:1997+A1:2001+A2:2008

---

## TECHNICAL INFORMATION

### Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- With or without a cut-out for grommet and wire management;
- With or without a scallop for wire management.

### Desk control button types

- NA – up and down drive;
- PA - up and down drive, 2 memory positions and screen that shows the frames of current height.

### Adjustable telescopic frame

- Square steel pipe dimensions: 40x20x550 mm
- Side support steel L shape 62x20x520 mm
- Adjustment range - 850 mm;
- Steel pipe part for adjustment - 35x15x1070 mm;
- Powder coated metal, matches the colour of columns and feet.

### Height adjustment button types



NA

PA

### Types of feet



#### Type Q

- Metal sheet 700x80x31 mm with welded profile for stability;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal; matches the colour of frame.



#### Type Z

- Metal tube – 700x75x31 mm with welded profile for stability;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal; matches the colour of frame.

### Lifting columns

- Types: two (2) or three (3) level columns;
- Anti-collision feature;
- Two motors;
- Soft start and soft stop;
- Lifting speed: up to 40 mm/ sec;
- Stroke length: 470 mm (two (2) level column) / 650 mm (three (3) level column);
- Rectangular tube dimensions: two (2) level column 50x70, 60x80 mm, three (3) level column 40x60, 50x70, 60x80 mm;
- Lifting capacity: 80 kg;
- Glide system solution prevents desk columns from possible paint scratches;
- Powder coated metal, matches the colour of frame and feet.

### Types of columns



Two (2) level column

Three (3) level column

---

## ELECTRICAL SPECIFICATION

### Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: 29 V (Button PA 35V D04);
- Power Plug: 2-pol; EU, UK, US;
- Energy consumption: standby 0,5 W (Button PA 0,2 W D04);
- Operating Cycle: 1 minute on, 9 minutes off.

---

## GUARANTEE



- 5 years

---

## MATERIALS

- Melamine: M1 (white), P (birch), T (beech), D1 (whitened oak), D2 (amber oak), U (walnut), N (grey);
- Metal: E (white), M (metallic), A (black).

## RANGE

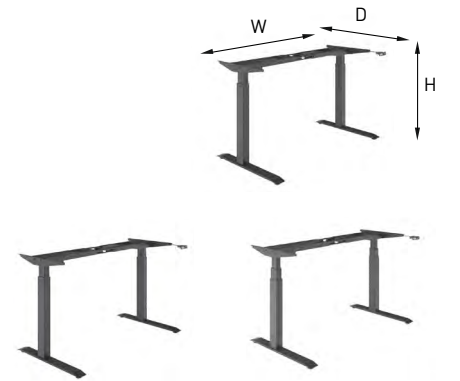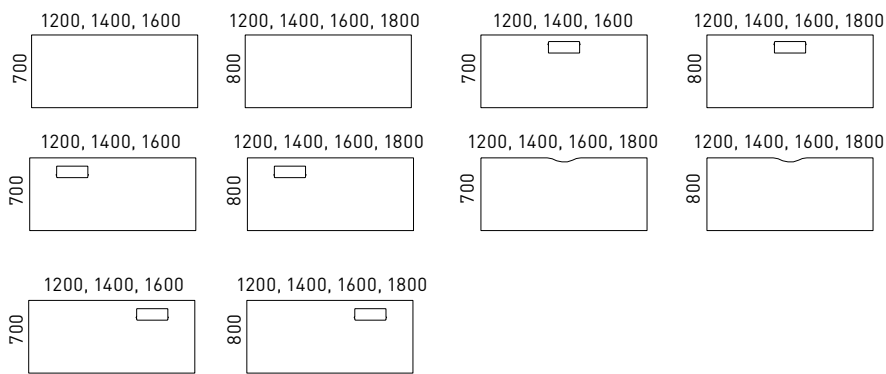


W 1146/1346/1546/1746  
D 700  
H 698-1168

W 1146/1346/1546/1746  
D 700  
H 617-1267

## ORDERING EXAMPLE

### Code structure

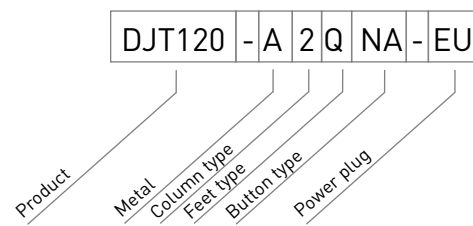

### Must be ordered (for desktops with cut-out)



Metal grommet:  
317x119 mm, H=27 mm

### Optional



Cable trays



Power socket blocks



Cable ducts



Screens



Felt-lined metal  
drawer with lock