

JAZZ meeting tables

Design by Christina Strand and Niels Hvass | Denmark



QUALITY STANDARD

- LST EN 14073-2:2004
- LST EN 527-1:2011
- LST EN 527-2:2003

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging;
- 26 mm MDF covered in laminate with sloping painted edges;
- Sloping desktop: edges painted in white or black colour;
- With or without a power socket.

Power sockets (included)

- By GOTESSONS (EU, UK, FR standards);
- 1 socket for 230 V and 4 holes for cable guides.

Plain edge
(melamine)



Sloping edge
(laminate)



Height adjustment
button integrated
in the desktop



Power socket
integrated into
desktop



Meeting tables

Metal frame

- Metal "L" profile: 50x50 mm;
- Powder coated metal, colour matches the leg.

Leg column

- Dimensions: 50x80x686 mm;
- Powder coated metal, black or white colour.

Feet

- Feet made of 12 mm thick steel sheet, colour matches the leg;
- Dimensions: 70x800x30 mm;
- Leg base has height levelling feet;
- Levelling feet covers made of black lacquered MDF.

Cable tray (included)

- Tray hides electric installation and power sockets;
- Dimensions: 920/1120x190x52 mm;
- No tools required to open;
- Available in white and black colours.

Height adjustable meeting tables with concrete base

Metal frame

- Metal profile: 50x50 mm;
- Powder coated metal; colour matches the lifting column.

LINAK DL5 lifting column

- Two motors and telescopic frame;
- Soft start and soft stop;
- Velocity speed: up to 38 mm/sec;
- Stroke length: 500 mm;
- Lifting capacity: 80 kg;
- Black or white colour.

Concrete base

- Dimensions: 600x600x45 mm;
- Grey colour by default (natural concrete);
- Water resistant / impregnated;
- Weight: 29 kg.

Electronic data power unit

- Input: 110-240 V;
- Frequency: 50/60 Hz;
- Output: 18 V;
- Power Plug: 2-pol;
- Energy use standby: 0,01 W;
- Operating Cycle: 1 minute on, 9 minutes off.

Cable tray (included)

- The tray hides electric leg's cable installation;
- No tools required to open;
- Powder coated; white or black (colour matches the lifting column).

Spiral electric cable

- 230 V, 1.5 m length cable;
- EU, UK, FR standards;
- Included;
- White or black (colour matches the lifting column);
- Fixed with metal holders to the top and bottom; holders colour matches the cable.


MATERIALS

- Laminate: H70 (white);
- Melamine: M1 (white);
- Natural concrete (base): C1 (grey);
- Metal: E (white), A (black).


GUARANTEE

- 5 years

RANGE

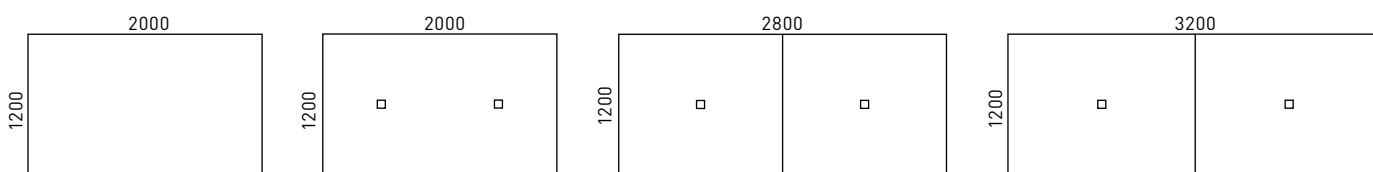


Meeting tables

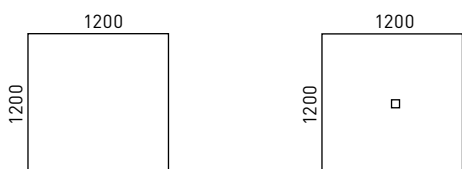

Height adjustable meeting tables with concrete base

ORDERING EXAMPLE

Code structure

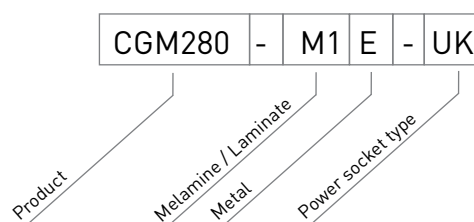

Optional



Power socket blocks